




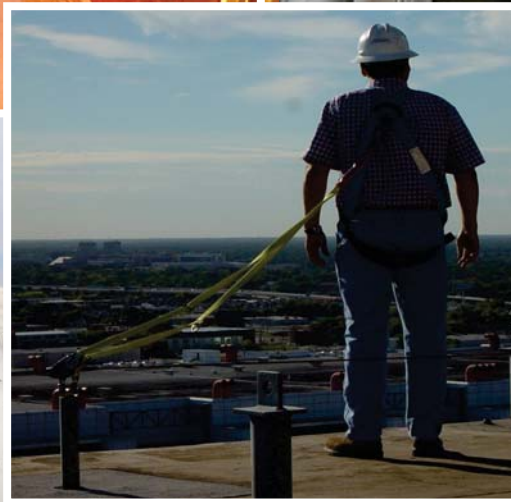

**SPECIALIZING IN SAFETY SOLUTIONS**

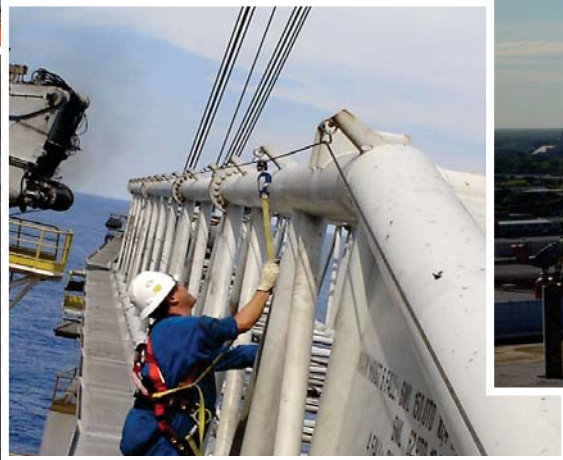

**FALL PROTECTION  
PRODUCTS**

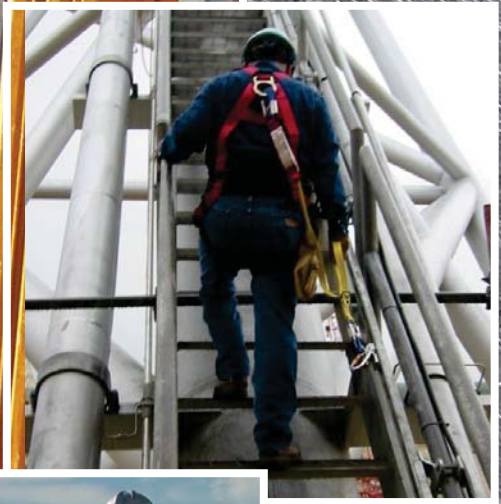



## **SPECIALIZING IN SAFETY SOLUTIONS**

### About Dentec Safety Specialists

**DENTEC SAFETY SPECIALISTS** serves the North American market through our national network of distributor partners assuring prompt service and technical expertise. Our mission is to provide safety solutions using a specialized approach and products. For those of you that use our products we personally **thank you** for your continued patronage.

For those of you that have not used our products, contact us. We'll be happy to demonstrate the many unique features these products offer and how your company and employees can benefit from their use.

# Fall Arrest Systems

			PAGE
<b><u>SAVED A LIFE PROGRAM</u></b>			4
<b><u>KEY DESIGN FEATURES</u></b>			5
<b><u>Harnesses</u></b>		Pages	6-8
	Custom Harness Imprinting		6
	Eco		6
	Black Widow		7
	Black Widow Tower		7
	Contractor		8
	Contractor Pro		8
	Contractor Pro Hi-Viz		8
<b><u>Lanyards</u></b>		Pages	9-10
	TOOL SPIDER™		9
	Hard Hat Tether		9
	ShockSorb™ Shock Pack		9
	ShockSorb™ Internal		10
	Web Positioning		10
<b><u>Rebar Chain Assemblies</u></b>		Page	10
<b><u>Self Retracting Devices</u></b>		Page	11
<b><u>Taglines</u></b>		Page	11
<b><u>Sizing Guide &amp; Symbols</u></b>		Page	12
<b><u>Fall Calculations</u></b>		Page	12
<b><u>Roofer's Kits</u></b>		Page	13
<b><u>Rope Grabs</u></b>		Page	13
<b><u>LifeLines</u></b>		Page	14
<b><u>Anchorage</u></b>		Pages	14-16
	Roof Anchors		14
	Pipe Anchor Hooks		14
	Concrete Anchor Straps		15
	Concrete Anchors		15
	Portable Anchoring Devices		16
<b><u>Rescue Pole</u></b>		Page	17
<b><u>Carabiners</u></b>		Page	17
<b><u>Suspension Trauma Relief</u></b>		Page	18
<b><u>Retail Packaging</u></b>		Page	19

# SAVED A LIFE PROGRAM

People working at heights risk their lives everyday and look forward to going home after work to be with their loved ones. Working at heights is a tough and scary job and we have to thank those that do this for a living be it on sky scrappers, bridges, power towers, offshore platforms or working on a roof to name a few.

Dentec Safety is committed to protecting people whether they are working in a workplace or at home. We stand behind our products and the people that count on them every day.

This is how our **SAVED A LIFE PROGRAM** works:

- When an individual falls while wearing a Dentec Safety harness and lanyard, we will provide them with free replacement products that were used to save their life.
- Simply return the used harness and lanyard to Dentec Safety Specialists with a letter providing the details and date of the fall and we will send a new replacement harness and lanyard free of charge along with a **SAVED A LIFE CERTIFICATE**.



# KEY DESIGN FEATURES

## Lanyard Keeper On Harnesses

High quality lanyard keeper provides the best combination of durability and performance.



## Lanyard Parks On Lanyard Hooks

Located on the hook of all Web Devices lanyards. Extra lanyard park available when the lanyard park on the harness breaks.



## Foam Lined Backpad

Dentec Safety uses a combination of a foam material and a breathable mesh fabric. The foam padding provides support but moves with the body as you bend and turn. The mesh fabric is breathable and allows perspiration to dry quickly. This combination provides additional comfort and performance for extended use.



## Plastic Ends

Located at the end of the harness straps prevents the web material from fraying and allows the user to grab the ends to tighten the strap even with work gloves.



## Quick Connect Buckles

Dentec Safety quick connect buckles are available in either steel or aluminum with anti-panic latches that require the user to push the clips forward to open. Provides extra security in a fall situation.



## Friction Adjustment

Optional adjustment allows for quick and simple sizing adjustment when needed.



## Inspection Tag Cover

All harness come with a 360° inspection cover made of heavy duty nylon. Provides complete protection of all inspection tags against the elements such as sun, dirt, rain, snow, oils, etc. Velcro closure allows for easy view of inspection tags.





# HARNESSES

## CUSTOM HARNESS IMPRINTING



DENTEC offers a simple & easy imprinting program that will allow you to promote your company brand and identify your employees working on a site with multiple contractors.

## RFID TAGS

Optional radio-frequency identification tags can be added to all harnesses and lanyards. This automatically identifies and tracks the fall protection products for annual company inspections and re-certifications. Software not provided.



## ECO Harnesses



- Full Body Harness
- Single Dorsal D-ring
- Soft webbing provides exceptional comfort and durability
- Plastic tips located at the end of each strap prevents fraying and allows the user to adjust the harness easily even when wearing work gloves
- High quality lanyard keepers
- Adjustable Mating Buckles on Chest Strap
- Available with adjustable mating buckles or tongue & buckle leg straps
- Rated to 310 lbs. (140kg) working weight

**Outstanding value!!**

Part #	Description			
16H33101FI	Eco Harness	MB	1-D	Universal Size
16H33111FI	Eco Harness	MB	1-D	5 pt. Adj. Universal Size
16H33101002FI	Eco Harness	MB	3-D	Universal Size
16H33102102FI	Eco Harness	MB	5-D	Universal Size
16H33102FI	Eco Harness	TB	1-D	Universal Size
16H33102002FI	Eco Harness	TB	3-D	Universal Size
16H33101FI URT	Eco Harness in Retail Box	MB	1-D	Universal Size
16H33102FI URT	Eco Harness in Retail Box	TB	1-D	Universal Size
16H33101FI URTL	Eco Harness in Retail Box with 6' Lanyard 3/4" hooks	MB	1-D	Universal Size



## BLACK WIDOW Harnesses

### Our most comfortable harness!

- Full Body Harness with Tubular Webbing and built in memory padding provides outstanding comfort. No need for shoulder pads!
- Single Dorsal D-ring
- 5 Point Adjustment
- Plastic tips located at the end of each strap prevents fraying and allows the user to adjust the harness more easily even when wearing work gloves
- Adjustable Torso Straps
- High quality lanyard keepers
- Available with aluminum anti-panic quick connect buckles, adjustable mating buckles or tongue & buckle leg straps
- Rated to 310 lbs. (140kg) working weight



Part #	Description			
16H02777FI	Black Widow Harness	MB	1-D	Universal Size
16H02777007FI	Black Widow Harness	MB	3-D	Universal Size
16H02474FI	Black Widow Harness	QC	1-D	Universal Size
16H02474007FI	Black Widow Harness	QC	3-D	Universal Size
16H02772FI	Black Widow Harness	TB	1-D	Universal Size
16H02772007FI	Black Widow Harness	TB	3-D	Universal Size



## BLACK WIDOW TOWER Harnesses

- Full Body Harness with Tubular Webbing, built in memory padding, shoulder pads & removable seat
- Outstanding comfort, breathable padding on back, shoulder, waist, bar seat and leg straps, wicks perspiration and dries quickly
- 8 Steel D-rings: One at back, two on hips, two on seat, one on chest strap and one on each shoulder
- 5 Point Adjustment
- Removable seat allows user to wear harness in other applications as a 6 D-ring harness
- Plastic tips located at the end of each strap prevents fraying and allows the user to adjust the harness more easily even when wearing work gloves
- Adjustable Torso Straps
- High quality lanyard keepers
- Aluminum anti-panic quick connect buckles on chest and leg straps
- Five inch back pad with accessory rings
- Rated to 310 lbs. (140kg) working weight



Part #	Description				
16H535BWTS	Black Widow Tower Harness	QC	8-D	BP	Small
16H535BWTM	Black Widow Tower Harness	QC	8-D	BP	Medium
16H535BWTL	Black Widow Tower Harness	QC	8-D	BP	Large
16H535BWTXL	Black Widow Tower Harness	QC	8-D	BP	XLarge
16H535BWTXXL	Black Widow Tower Harness	QC	8-D	BP	2XLarge
16H535BWTXXXL	Black Widow Tower Harness	QC	8-D	BP	3XLarge



# HARNESSES

## CONTRACTOR Harnesses



### CONTRACTOR SERIES SIZING

- Waist Sizes: 28" - 34" Small
- 34" - 38" Medium
- 38" - 42" Large
- 42" - 52" XLarge
- 52" - 54" 2XLarge

- Full Body Harness
- Single Dorsal D-ring & Hip D-rings
- 5 Point Adjustment
- Shoulder Pads provide additional comfort when carrying tools
- Breathable foam back support material provides support while contouring to the individual's shape increasing overall comfort for extended use
- Plastic tips located at the end of each strap prevents fraying and allows the user to adjust the harness more easily even when wearing work gloves
- Adjustable Mating Buckles on Chest Strap
- Heavy Duty Friction Torso Strap Adjusters
- Removable Tool Belt & Lanyard Keeper
- Available in Tongue Buckle Leg Straps or Quick Connect with anti-panic latches
- Rated to 310 lbs. (140kg) working weight

Part #	Description				
16H12352WSMFI	Contractor Harness	TB	3-D	BP	Small
16H12352WMFI	Contractor Harness	TB	3-D	BP	Medium
16H12352WLF	Contractor Harness	TB	3-D	BP	Large
16H12352WXLFI	Contractor Harness	TB	3-D	BP	XLarge
16H12352WXXLFI	Contractor Harness	TB	3-D	BP	2XLarge
16H12353WSMFI	Contractor Harness	QC	3-D	BP	Small
16H12353WMDFI	Contractor Harness	QC	3-D	BP	Medium
16H12353WLGFI	Contractor Harness	QC	3-D	BP	Large
16H12353WXLFI	Contractor Harness	QC	3-D	BP	XLarge
16H12353WXXLFI	Contractor Harness	QC	3-D	BP	2XLarge

## CONTRACTOR PRO / CONTRACTOR PRO HI-VIZ Harnesses



- Full Body Harness
- Single Dorsal D-ring
- 5 Point Adjustment
- Shoulder Pads
- Anti-panic Quick Connect Chest & Leg Straps
- Tongue Buckle Torso Straps
- Hip D-rings
- Removable Tool Belt
- Breathable foam back support material provides support while contouring to the individual's shape increasing overall comfort for extended use
- Retro Reflective Torso Front, Back & Waist Strips on Contractor Pro Hi-Vis
- Rated to 310 lbs. (140kg) working weight

Part #	Description				
16H22363WSFI	Contractor Pro Harness	QC	3-D	BP	Small
16H22363WMFI	Contractor Pro Harness	QC	3-D	BP	Medium
16H22363WLF	Contractor Pro Harness	QC	3-D	BP	Large
16H22363WXLFI	Contractor Pro Harness	QC	3-D	BP	XLarge
16H22363WXXLFI	Contractor Pro Harness	QC	3-D	BP	2XLarge
16H22363WRSFI	Contractor Pro Hi-Vis Harness	QC	3-D	BP	Small
16H22363WRMFI	Contractor Pro Hi-Vis Harness	QC	3-D	BP	Medium
16H22363WRLFI	Contractor Pro Hi-Vis Harness	QC	3-D	BP	Large
16H22363WRXLFI	Contractor Pro Hi-Vis Harness	QC	3-D	BP	XLarge
16H22363WRXXLFI	Contractor Pro Hi-Vis Harness	QC	3-D	BP	2XLarge





## TOOL SPIDER™

## LANYARDS

- Designed to satisfy the need for elastic lanyards
- Reduce the frequency of dropped tools and worker injuries
- Elastic except 16ATS 6/80-0-12 it is made with lanyard material.
- Attaches to a harness for easy mobility and flexibility when reaching out with hand tools



Part #	Description	Stretch	Capacity Load
16ATS 18/30	TOOL SPIDER™ w/Aluminum Carabiner	18" - 30"	15 lbs. Capacity Load
16ATS 18/30 SG	TOOL SPIDER™ w/Small Stainless Steel Screw Gate	18" - 30"	15 lbs. Capacity Load
16ATS 18/30-30 SG	TOOL SPIDER™ w/Stainless Steel Screw Gate	18" - 30"	30 lbs. Capacity Load
16ATS 6/80-0-12	TOOL SPIDER™ w/ Stainless Steel Clip Hook, 5 Ft.	No Stretch	80 lbs. Capacity Load

Part #	Description
14ATS HH-LANYARD	HARD HAT LANYARD

## ShockSorb™ SHOCK PACK LANYARDS

- E4 Rated = up to 254 lbs. (115kg)
- E6 Rated = up to 386 lbs. (175kg)
- Lanyard Park included with every lanyard




**SINGLE LEG**



### Available Options:

- 4', 6' or 4-6'
- 3/4" or 2 1/4" Hook
- Single or Twin leg
- E4 or E6 Rated



Part #	Description - E4 Rated	Part #	Description - E6 Rated
16L111401	4' Single Leg w / 3/4" Hook	16LSL921401	4' Single Leg w / 3/4" Hook
16L111601	6' Single Leg w / 3/4" Hook	16LSL921601	6' Single Leg w / 3/4" Hook
16L111602	6' Single Leg w / 2 1/4" Hook	16LSL921602	6' Single Leg w / 2 1/4" Hook
16L1116A1	4'-6' Single Leg w / 3/4" Hook	16LSL9216A1	4'-6' Single Leg w / 3/4" Hook
16L1116A2	4'-6' Single Leg w / 2 1/4" Hook	16LSL9216A2	4'-6' Single Leg w / 2 1/4" Hook
16LSPL121401	4' Twin Leg w / 3/4" Hook	16LSL911401	4' Twin Leg w / 3/4" Hook
16LSPL121601	6' Twin Leg w / 3/4" Hook	16LSL921601	6' Twin Leg w / 3/4" Hook
16LSPL121602	6' Twin Leg w / 2 1/4" Hook	16LSL921602	6' Twin Leg w / 2 1/4" Hook
16LSPL1216A1	4'-6' Twin Leg w / 3/4" Hook	16LSL9216A1	4'-6' Twin Leg w / 3/4" Hook
16LSPL1216A2	4'-6' Twin Leg w / 2 1/4" Hook	16LSL9216A2	4'-6' Twin Leg w / 2 1/4" Hook



**TWIN LEG**



# LANYARDS

## ShockSorb™ INTERNAL LANYARDS



- E4 Rated: 254 lbs. (115 kg)
- Lanyard Park included with every lanyard

### Available Options:

- 4' Yellow or 6' Red Colour Webbing
- Single or Twin leg
- 3/4" or 2 1/4" Hook



### SINGLE LEG



Part #	Description
16LSLM3411	4' Yellow Single Leg w / 3/4" Hook
16LSM3611	6' Red Single Leg w / 3/4" Hook
16LSLM3421	4' Yellow Single Leg w / 2 1/4" Hook
16LSLM3621	6' Red Single Leg w / 2 1/4" Hook
16LSLM3612	4' Yellow Twin Leg w / 3/4" Hook
16LSLM3422	4' Yellow Twin Leg w / 2 1/4" Hook
16LSLM3622	6' Red Twin Leg w / 2 1/4" Hook



### TWIN LEG



CERTIFIED

## WEB POSITIONING LANYARDS



### Available Options:

- 2', 4' or 6' - 1" Web Positioning
- 4'-6' Single Positioning
- 3/4" Snap Hooks

Part #	Description
16LP2211	2' - 1" Web positioning w / 3/4" Snap Hooks
16LP4211	4' - 1" Web positioning w / 3/4" Snap Hooks
16LP6211	6' - 1" Web positioning w / 3/4" Snap Hooks
16LP6A211	4' - 6' Single positioning w / 3/4" Snap Hook

## REBAR CHAIN ASSEMBLIES

- Rebar positioning device
- 2.25" Rebar Hook
- RBC model denotes chain
- Chain 1' total length

Part #	Description
16LRBC211	Rebar Chain Assembly



# SELF RETRACTING DEVICES



- Composite Housing
- Swivel Load Indicator Hook

## Options:

- Cable or Web
- 20', 30', 50' or 75' (Cable)
- 7' or 11' (Web)
- 7' Twin Pack (Web)
- Type 1 SRL : 1.5m - 3m
- Type 2 SRL : Greater than 3m



Part #	Description	Type
16SRL0072215	7' Web SRL	1
16SRL0072215TWIN	7' Web SRL Twin Pack	1
16SRL0112115	11' Web SRL	1
16SRL0201115	20' Cable SRL	2
16SRL0301115	30' Cable SRL	2
16SRL0501115	50' Cable SRL	2
16SRL0751115	75' Cable SRL	2



## TAGLINES



- SRL Tagline
- 1/4" Braided Rope
- Swivel hook helps prevent entanglement
- For use with SRD's
- Extends the life of the retractable

Part #	Description
16STL15-SRL	15' SRL Tagline
16STL20-SRL	20' SRL Tagline
16STL25-SRL	25' SRL Tagline
16STL30-SRL	30' SRL Tagline
16STL50-SRL	50' SRL Tagline
16STL100-SRL	100' SRL Tagline



- TLD2-size
- 5/8" Poly plus rope 10,000 lbs. Mbs
- Urethane coating
- 2" Gate opening carabiner with 5,000 lbs mbs and 3,600 lbs. Gate
- Tangle free
- Easy grip

Part #	Description
16ATLD2-15	15' Tagline / 10' Coated Orange / 5' Yellow Tube
16ATLD2-20	20' Tagline / 10' Coated Orange / 10' Yellow Tube
16ATLD2-25	25' Tagline / 10' Coated Orange / 15' Yellow Tube
16ATLD2-30	30' Tagline / 15' Coated Orange / 15' Yellow Tube
16ATLD2-35	35' Tagline / 15' Coated Orange / 20' Yellow Tube
16ATLD2-40	40' Tagline / 20' Coated Orange / 20' Yellow Tube



# SIZING GUIDE & SYMBOLS

## HOW TO MEASURE FOR A FULL BODY HARNESS (Measurements are over clothing)

### Sizing Chart for Full Body Harnesses with Integral Waistbelt

Proper fit is critical for personal safety & working comfort. The charts below specify how to measure your body for the correct fit of Fall Protection equipment.

SIZE	WAIST MEASUREMENT INCHES	WAIST MEASUREMENT CENTIMETRES
S	32-40	80-100
M	36-44	90-110
L	40-48	100-120
XL	44-52	110-130
2XL	48-56	120-140
3XL	52-60	130-150



Fall Arrest



Positioning



Controlled Descent  
&  
Suspension



Fall Prevention



Limited Access  
(Retrieval)




Ladder Climbing

**ALL HARNESSES Are Rated To 310 lbs. (140kg) Working Weight**  
**LANYARDS E4 RATED = Up To 254 lbs. (115kg)**  
**LANYARDS E6 RATED = Up To 386 lbs. (175kg)**

## FALL CALCULATIONS

### Personal Fall Arrest System Anchorage Points

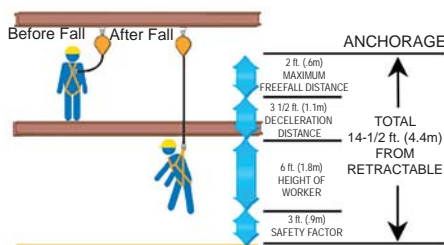


#### Calculating Fall Clearance Distance Using a Retractable Lifeline

- First, add the maximum free fall distance (2 ft.) with a retractable lifeline to the maximum deceleration distance (3-1/2 ft.) to the average height of a worker (6 ft.).
- Then, add a safety factor of 3 ft. to allow for the possibility of an improperly fit harness, a taller than average worker and/or a miscalculation of distance.
- The total, 14-1/2 ft. is the suggested safe fall clearance distance for this example.

**NOTE:**  
When using a retractable lifeline, the distance is calculated from the point where the retractable attaches to the back D-ring of the worker's harness.

### Personal Fall Arrest System Anchorage Points

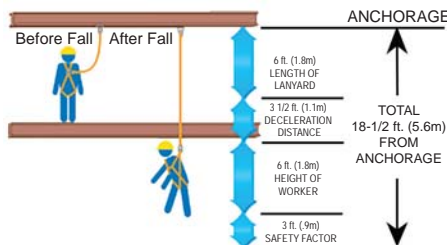

#### Calculating Fall Clearance Distance Using a Shock-Absorbing Lanyard and D-Ring Anchorage Connector

- First, add the length of the shock-absorbing lanyard (6 ft.) to the maximum elongation of the shock absorber during deceleration (3-1/2 ft.) to the average height of a worker (6 ft.).
- Then, add a safety factor of 3 ft. to allow for the possibility of an improperly fit harness, a taller than average worker and/or a miscalculation of distance.
- The total, 18-1/2 ft. is the suggested safe fall clearance distance for this example.

**NOTE:**  
Should the shock-absorbing lanyard be used in conjunction with a cross-arm anchorage connector or other, the additional length of the anchorage connector must be taken into consideration.

# ROOFER'S KIT



Part #	Description
16KROOF25	Roofer's Kit with 25' Lifeline
16KROOF50	Roofer's Kit with 50' Lifeline

- Full Body Eco Harness
- Polyester Lifeline 5/8" - Snap Hook on One End / Thimble on the Other End
- Permanently Attached 2' Rope Grab and ShockSorb™ Assembly
- Roof Anchor
- Stowage Pail
- Aluminum Mating Buckle Chest Strap

**Options:** • 25' or 50' Lifeline Length

## ROPE GRABS

Part #	Description
16LRGGR 85-52S	5/8" Trailing Rope Grab



- Attached 2' Shock Pack Lanyard
- 3/4" Snap Hook



Part #	Description
16RG19260-2	R5/8" Trailing Rope Grab w/ 2.44" Ring - Anti-Inversion / Anti-Panic



- Fits 5/8" 3-strand rope
- 2.44" Ring - Anti-Inversion / Anti-Panic

# LIFELINES



Part #	Description
16VL50	50' - 5/8" Rope Lifeline with 3/4" Snap Hooks on each end
16VL25-TT	25' - 5/8" Rope Lifeline with Thimbles on each end
16VL50-TT	50' - 5/8" Rope Lifeline with Thimbles on each end
16VL25-1	Vertical Lifeline - 5/8" x 25' with 3/4" Snap Hook / Thimble Eye
16VL30-1	Vertical Lifeline - 5/8" x 30' with 3/4" Snap Hook / Thimble Eye
16VL50-1	Vertical Lifeline - 5/8" x 50' with 3/4" Snap Hook / Thimble Eye
16VL75-1	Vertical Lifeline - 5/8" x 75' with 3/4" Snap Hook / Thimble Eye
16VL100-1	Vertical Lifeline - 5/8" x 100' with 3/4" Snap Hook / Thimble Eye

## Available Options:

- 25', 30', 50', 75' or 100' with 3/4" Snap Hook / Thimble Eye
- 25' or 50' with Thimbles on each end
- 50' 3/4" Snap Hook on each end

# ANCHORAGE

## ROOF ANCHORS



### REUSABLE

- For temporary use on wood rooftops
- Can be installed with screws or duplex nails
- Fits up to 12/12 roof pitch
- Can be used between trusses when all holes are filled
- Meets standards for fall arrest

Part #	Description
16AD13053-1	Reusable Roof Anchor

### SINGLE-USE

- For temporary use on wood rooftops
- Fits any roof pitch
- Can be used between trusses when all holes are filled
- Meets standards for fall arrest
- Easy installation

Part #	Description
16AD13057-1	Single-Use Roof Anchor



## PIPE ANCHOR HOOKS



### HANDY HOOK

- Stainless Steel Anchor
- Electro Polished 304
- 2" Anchor Connector Size
- Hybrid Connector

Part #	Description
16ADHANDHOOK 2	2" Pipe Anchor Hook



## CONCRETE ANCHOR STRAPS

A versatile product, Concrete Anchor straps are gaining in popularity as an inexpensive anchor solution. As a disposable anchor point, our straps can be used in other applications such as wood framing members, rebar, pipe racking, etc.




**WEBBING LOOP TO LOOP**



**WEAR PAD LOOP**

### Available Options:

- 3', 4' or 6' - 1" 9800 lb webbing loop to loop
- 3' with 24" wear pad loop on one end / D ring on other end
- 4' or 6' with 36" wear pad loop on one end / D ring on other end

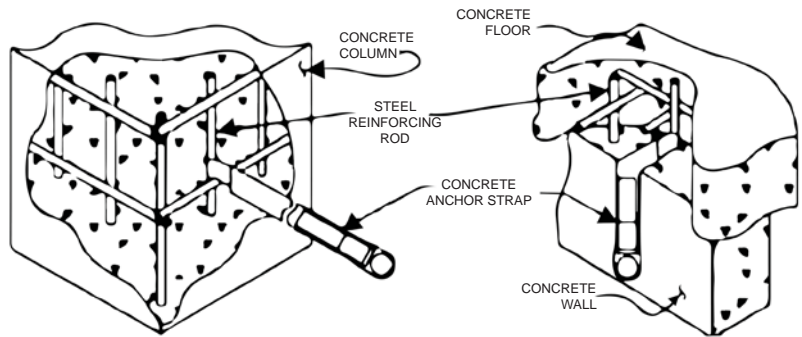

Part #	Description
16SLCON1-300LL	3' - 1" Concrete Anchor Strap 9800 lb. webbing loop to loop
16SLCON1-408LL	4' - 1" Concrete Anchor Strap 9800 lb. webbing loop to loop
16SLCON1-608LL	6' - 1" Concrete Anchor Strap 9800 lb. webbing loop to loop
16SLCON1-324L2	3' - Concrete Anchor Strap with 24" Wear Pad loop / D-Ring
16SLCON1-436L2	4' - Concrete Anchor Strap with 36" Wear Pad loop / D-Ring
16SLCON1-636L2	6' - Concrete Anchor Strap with 36" Wear Pad loop / D-Ring

## CONCRETE ANCHORS



**5K CONCRETE ANCHOR**

- 3/4" hole diameter, 3" deep minimum
- 5,000 lb. capacity
- Designed for single user connection
- Great for anchoring scaffolding
- Use on vertical or overhead applications
- Designed for use in cured concrete with a compression strength of at least 3000 psi
- Easy installation, compress spring and insert cable shaft into hole
- Constructed of stainless steel, aluminum and other non-corrosive materials
- Temporary, reusable



**10K CONCRETE ANCHOR**

- Shall only be used as a personal anchorage connector
- Warning! Web Devices cannot be held responsible for other HLL Systems which could be used with this anchorage connector
- Users shall be responsible for any connections to this anchorage connector other than the recommended components

Part #	Description
16ADCONN-00235	3/4" 5K Portable Concrete Anchor Connector
16ADCONN-00236	1" 10K Portable Concrete Anchor Connector

# ANCHORAGE

## PORTABLE ANCHORING DEVICES



### 16ADCONN-AO46FS

#### 5/8" D-RING ANCHOR CONNECTOR

- Fixed Forged Anchor Connector
- Mounting surface must have minimum tensile strength of 5,000 lbs.
- 2<sup>13</sup>/<sub>32</sub>" tall x 2<sup>7</sup>/<sub>16</sub>" wide

Part #	Description
16ADCONN-AO46FS	5/8" D-Ring Anchor Connector
16ADBMRBWA012N	12" I-Beam Slider/ Push Button / Fixed other end
16ADBMR-BWA014B	14" x 3 1/4" I-Beam Slider / 2 Side Adjustment
16ADTROLLEY 310	Trolley Slider
16ADBC-15	Fixed Vertical / Horizontal Anchor



#### I-BEAM SLIDER

### 16ADBMRBWA012N

- Horizontal Beam
- Cast Aluminum
- 3<sup>1</sup>/<sub>4</sub>" x 12"
- Adjustable Push button end / Fixed End
- Static tensile strength: 5,000 lbs. minimum
- Net weight 4 lbs.



### 16ADBMR-BWA014B

- Horizontal Beam
- Steel
- 3<sup>1</sup>/<sub>4</sub>" x 14"
- Both ends are adjustable
- Static tensile strength: 5,000 lbs. minimum
- Net weight 4 lbs.

#### FIXED VERTICAL / HORIZONTAL ANCHOR

### 16ADBC-15

- For Anchorage Connection on structural beams up to 15" wide
- 10,000 lbs. capacity



#### TROLLEY SLIDER

### 16ADTROLLEY 310

- Horizontal Beam
- Aluminum cross bar & rollers
- Polyester webbing
- Zinc Plated Steel swivel
- Stainless Steel spring & hardware
- Beam flange width range: 3" - 10"
- Beam flange thickness: Up to 7/8"
- Static tensile strength: 5,000 lbs. minimum
- Net weight 7.7 lbs.



# RESCUE POLE



- Extendable 8 ft. - 15 ft. Combination Aluminum and Fiberglass Pole
- Stainless Steel Hook Assembly
- 2 Double Sheave Stainless Steel Swivel Blocks
- 100 ft. - 7/16" Kernmantle Rope
- 4 ft. Anchor Sling
- Fail-Safe Prusik Hitch and Carabiner
- Heavy Duty Vinyl Reinforced Stowage Bag
- Laminated Instruction Sheet & Video



Part #	Description
16ADRP 815	Rescue Pole Kit Complete with Bag
16ADMSC-BAG-RP	Rescue Pole Stowage Bag



## CARABINERS



16AD17426



16AD17443



16AD17450



16AD17451

Part #	Description	Part #	Description
16AD17426	PIN / ATL / FR / 2 1/4" GO / 45kN / 3.6M Gate	16AD17450	ATL / FR / 1/2" GO / 40kN / 3.6M Gate
16AD17443	ATL / FR / 1 1/8" GO / 35kN / 3.6M Gate	16AD17451	ATL / FR / 3/4" GO / 50kN / 3.6M Gate



# SUSPENSION TRAUMA RELIEF

## SELF RESCUE



Leg Up Case easily attaches to shoulder strap for accessibility


### LEG UP

- Provides user relief in post fall arrest suspension trauma by keeping the user's blood flowing
- Web bridle and adjustable foot stirrups fit easily into a convenient pouch
- Easily retrofitted to any full body harness without alteration
- Attaches to D-Ring
- US Patent Pending

Part #	Description
16ALU-2NA	Trauma Strap Non Adjustable
16ALU-2	Trauma Strap Adjustable



During a fall arrest the Leg Up will partially deploy. The user can then easily pull it from the pouch and find a comfortable sitting or standing position.

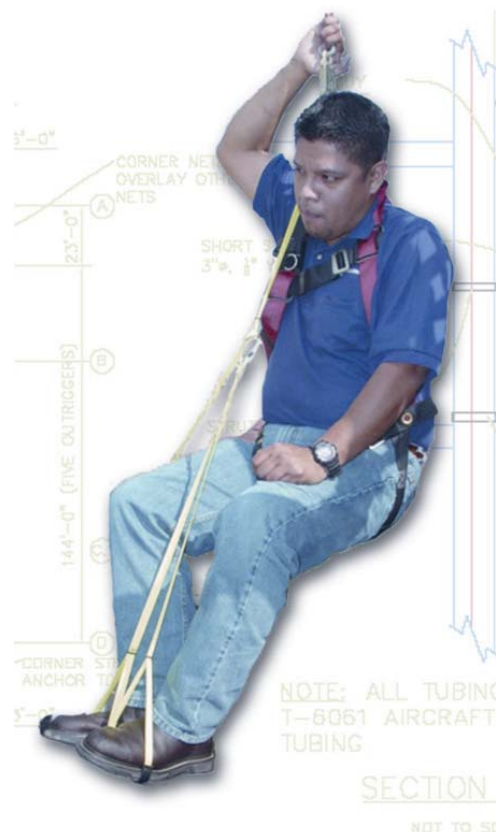

# RETAIL PACKAGING

## ECO Harnesses



CERTIFIED

Part #	Description			
16H33101FI URT	Eco Harness in Retail Box	MB	1-D	Universal Size
16H33102FI URT	Eco Harness in Retail Box	TB	1-D	Universal Size
16H33101FI URTL	Eco Harness in Retail Box with 6' Lanyard 3/4" hooks	MB	1-D	Universal Size



CERTIFIED

## CONTRACTOR Harnesses


Part #	Description				
16H12352WSMFI URT	Contractor Harness in Retail Pail	TB	3-D	BP	Small
16H12352WMFI URT	Contractor Harness in Retail Pail	TB	3-D	BP	Medium
16H12352WLFU URT	Contractor Harness in Retail Pail	TB	3-D	BP	Large
16H12352WXLFI URT	Contractor Harness in Retail Pail	TB	3-D	BP	XLarge
16H12352WXXLFI URT	Contractor Harness in Retail Pail	TB	3-D	BP	2XLarge

## ShockSorb™ SHOCK PACK LANYARDS



CERTIFIED

Part #	Single Leg - E4 Rated	Part #	Twin Leg - E4Rated
16L111401RT	4' Single Leg w / 3/4" Hook in Retail Box	16LSPL121401RT	4' Twin Leg w / 3/4" Hook in Retail Box
16L111601RT	6' Single Leg w / 3/4" Hook in Retail Box	16LSPL121601RT	6' Twin Leg w / 3/4" Hook in Retail Box
16L111602RT	6' Single Leg w / 2 1/4" Hook in Retail Box	16LSPL121602RT	6' Twin Leg w / 2 1/4" Hook in Retail Box



CERTIFIED

## ShockSorb™ INTERNAL SHOCK LANYARDS

Part #	Single Leg - E6 Rated	Part #	Twin Leg - E6 Rated
16LSM3612RT	6' Single Leg w / 3/4" Hooks in Retail Box	16LSLM3422RT	4' Twin Leg w / 2 1/4" Hooks in Retail Box
16LSM3621RT	6' Single Leg w / 2 1/4" Hooks in Retail Box	16LSLM3622RT	6' Twin Leg w / 2 1/4" Hooks in Retail Box



## SUSPENSION TRAUMA RELIEF SELF RESCUE

Part #	Description
16ALU-2NART	Trauma Strap Non Adjustable in Retail Box



## ROPE GRABS



Part #	Description
16LRGGR 85-52SRT	5/8" Trailing Rope Grab in Retail Box



CERTIFIED

## CONCRETE ANCHOR STRAPS

Part #	Description
16SLCON1-300LLRT	3' - 1" Concrete Anchor Strap 9800 lb. webbing loop to loop in Retail Box





**SPECIALIZING IN SAFETY SOLUTIONS**

**[www.dentecsafety.com](http://www.dentecsafety.com)**

**Email: [dentec@dentecsafety.com](mailto:dentec@dentecsafety.com)**

**Toll Free: 1.888.533.6832**

**Toll Free Fax: 1.888.953.9946**

Distributed by: